


>> Design Concept & Competitive Advantages

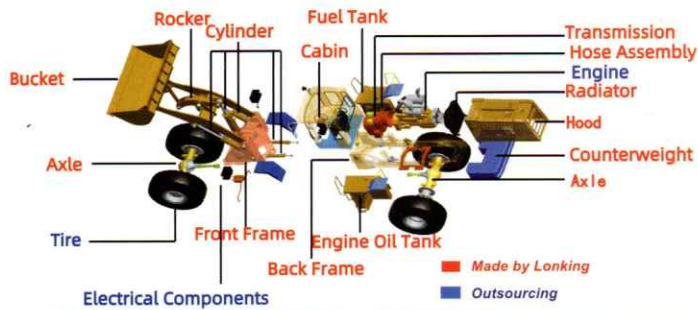

Vertical integration strategy

7-stage lifecycle product management practices

Practicality & Easy Maintenance

>> Lonking at Site





BC: Bucket capacity. RL: Rated load. ENG: Engine power. MH: Max Height

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM926N (Tier 2)	4450	0.65	1200	36.8/49.5

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM932N (Tier 2)	5230	0.8	1500	65/87
CDM932NG (Tier 3, LCVM)	5230	0.8	1500	60/80
CDM926N (Euro V)	4450	0.75	1500	45/60

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM936N (Tier 2)	6380	1.2	2000	75/100.5
CDM936N (Tier 3, LCVM)	6380	1.2	2000	85/114.0

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM816D (Tier 2)	5500	0.95	1600	55/73.7
CDM818D (Tier 2)	5600	1.05	1800	63/84.5
CDM818D (Tier 3, LCVM)	5600	1.05	1800	62.5/83.8

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM820DRA (Canopy)	6200	1.20	2000	66.2/88.8
CDM820DA (Cabin)	6400	1.20	2000	66.2/88.8

	OW(kg)	MH(mm)	RL(kg)	ENG(kW/hp)
CDM932NYC (Tier 3)	5130	3000	2500	60/80
CDM936NYC (Tier 3)	6990	5500	3000	85/114

ENG: Engine power. BC: Bucket capacity. RL: Rated load.

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM303(Tier 2)	1640	0.15	344	18.1/24
CDM303(Tier 4F/Euro V)	1640	0.15	344	18.5/24.8

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM307 (Tier 2)	2800	0.43-0.48	760	36.7/49.2
CDM307 (Tier 3)	2800	0.43-0.48	752	36/48.3
CDM307 (Tier 4F/Euro V)	2800	0.43-0.48	752	44.8/60

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM308 (Tier 2)	2900	0.48	899	36.7/49.2
CDM308 (Tier 3)	2900	0.48	899	36/48.3
CDM308 (Tier 4F/Euro V)	2900	0.48	861	44.8/60.0

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM312 (Tier 2)	3500	0.54	1230	55/73.7
CDM312 (Tier 3)	3500	0.54	1230	63/84.5
CDM312 (Tier 4F/Euro V)	3500	0.54	1230	55.8/74.8

	OW(kg)	BC(m³)	RL(kg)	ENG(kW/hp)
CDM315T(Tier 2)	5440	0.75	1500	73.5/98.6
CDM315T(Tier 4F/Euro V)	5440	0.75	1500	81.8/110

BC: Bucket Capacity. ENG: Engine power

	OW(kg)	BC(m³)	ENG(kW/hp)
83C (Tier 2)	8300	0.2/1.0	74/100
83C(Tier 4F/Euro V)	8300	0.2/1.0	74/100

	OW(kg)	BC(m³)	ENG(kW/hp)
83D (Tier 2/LCVM)	8000	0.2/1.0	74/100
83D(Tier 4F/Euro V)	8000	0.2/1.0	74/100

	OW(kg)	BC(m³)	ENG(kW/hp)
84C (Tier 2)	9200	0.26/1.3	74/100
84C(Tier 4F/Euro V)	9200	0.26/1.3	74/100

HYDRAULIC EXCAVATOR

OW: Operating weight. RP: Rated power. BC: Bucket capacity. TS: Travel Speed.

Mini Excavator

CDM6010 Euro V

OW:	1010 kg
RP:	7.2/9.6 kW/hp
BC:	0.022-0.04 m³
TS:	1.5/2.9 km/h



CDM6016 Tier 4F / Euro V

OW:	1700 kg
RP:	11.8-15.8 kW/hp
BC:	0.04-0.12 m³
TS:	2.3/4.0 km/h



2T

CDM6020 Canopy Tier 4F / Euro V

OW:	1860 kg
RP:	13.4/18 kW/hp
BC:	0.04-0.10 m³
TS:	2.5-4.5 km/h



CDM6020 Cabin Tier 4F / Euro V

OW:	2000 kg
RP:	13.4/18 kW/hp
BC:	0.04-0.10 m³
TS:	2.5-4.5 km/h



2.5-3.5T

CDM6025 Tier 4F / Euro V

OW:	2650 kg
RP:	14.6/19.5 kW/hp
BC:	0.08-0.14 m³
TS:	2.6/4.4 km/h



CDM6035 Tier 4F / Euro V

OW:	3850 kg
RP:	18.1/24.2 kW/hp
BC:	0.11-0.26 m³
TS:	2.3/4.0 km/h



Small Excavator 6-6.5T

CDM6060-CDM6065 Tier 3

OW:	5850-6050 kg
RP:	36.8-46.3/49-62 kW/hp
BC:	0.25-0.33 m³
TS:	2.5/4.2 km/h



CDM6060F Tier 4F / Euro V

OW:	6050 kg
RP:	42.4-56.9 kW/hp
BC:	0.25-0.33 m³
TS:	3.0/5.2 km/h



7.5-8T

CDM6075 Tier 3

OW:	7680 kg
RP:	45-46.3/60-62 kW/hp
BC:	0.28-0.45 m³
TS:	2.8/4.5 km/h



CDM6080 Tier 3

OW:	8000 kg
RP:	56.5/75.7 kW/hp
BC:	0.30-0.45 m³
TS:	2.8/4.5 km/h



Medium Excavator 13-20T

CDM6135-CDM6150 Tier 3-Tier 4F/Euro V

OW:	13560 kg
RP:	74-86/99-115 kW/hp
BC:	0.40-0.75 m³
TS:	3.3/5.5 km/h



CDM6205 Tier 3

OW:	21100 kg
RP:	129/173 kW/hp
BC:	0.8-1.0 m³
TS:	3.2/5.1 km/h



22T

CDM6225 (S/N) Tier 2-Tier 4F/Euro V

OW:	21800 kg
RP:	112/150 kW/hp
BC:	0.8-2.0 m³
TS:	3.1/5.6 km/h



CDM6225 Tier 3

OW:	21800 kg
RP:	124-129/166-173 kW/hp
BC:	0.8-2.0 m³
TS:	3.2/5.6 km/h



WHEEL LOADER

OW: Operating weight. BC: Bucket capacity. RL: Rated load. ENG: Engine power. B: Battery

3.0T		CDM833 (Tier 2) CDM833 (Tier 3, LCVM)	OW(kg) 10300±300 11620±300	BC (m³) 1.7-3.0 1.8-3.0	RL(kg) 3000 3500	ENG(kW/hp) 92/123 92/123
3.5T		CDM835 (Tier 2) CDM835 (Tier 4F / Euro V)	OW(kg) 11300±300 11400±300	BC (m³) 1.8-3.0 1.8-3.0	RL(kg) 3500 3500	ENG(kW/hp) 97-105/140 105/140
4.0T		CDM843 (Tier 2)	OW(kg) 12460±300	BC (m³) 2.3-3.0	RL(kg) 4000	ENG(kW/hp) 129/173
5.0T		CDM853 (Tier 2)	OW(kg) 16200±300	BC (m³) 2.7-3.5	RL(kg) 5000	ENG(kW/hp) 162/217
		LG855H (Tier 2)	OW(kg) 17200±300	BC (m³) 3.0-4.5	RL(kg) 5000	ENG(kW/hp) 162/217
		ZL50HC (Tier 2) ZL50HCS (Tier 3, Heavy-duty)	OW(kg) 17300±300 18800±300	BC (m³) 3.0-5.0 3.0-5.0	RL(kg) 5000 5600	ENG(kW/hp) 162/217 162/217
5.5T		CDM856 (Tier 2/Tier 4F/Euro V) CDM856 (Tier 3, LCVM)	OW(kg) 17200±300 17300±300	BC(m³) 3.0-5.0 3.0-5.0	RL(kg) 5500 5500	ENG(kW/hp) 162/217 154/206
6.5T		LG863H (Tier 2) CDM866 (Tier 3)	OW(kg) 21700±300 21700±300	BC (m³) 3.5-6.0 3.5-6.0	RL(kg) 6500 6500	ENG(kW/hp) 175/235 17/238
7T		CDM876 (Tier 3)	OW(kg) 23500±300	BC (m³) 4.2-7.0	RL(kg) 7000	ENG(kW/hp) 199/267
Stone Fork Loader		LGFT18 (Tier 3) LGFT28 (Tier 3)	OW(kg) 23900±300 30100±300	Fork Size (mm) 1400×200×120 1520×240×140	RL(kg) 18000 28000	ENG(kW/hp) 162/217 178/238
Electric Wheel Loader		LG820E(70/105kwh)	OW(kg) 6600±300	BC(m³) 1.2	RL(kg) 2000	B(kWh) 70
3T		LG833HE(141/181kwh)	OW(kg) 10200±300	BC(m³) 1.7-2.5	RL(kg) 3000	B(kWh) 141
5-7T		LG856HE (282/350kwh) LG866HE (350/423kwh) LG876HE(423kwh)	OW(kg) 17800±300 21900±300 23500±300	BC(m³) 2.2-5.6 3.5-7.0 4.2-7.0	RL(kg) 5500 6500 7500	B(kWh) 282 350 423

MINI WHEEL LOADER

OW: Operating weight

Series N - 1.2T



Series N - 1.5T



Series N - 2T



Series D - 1.6T/1.8T



Underground Loader



Rough Terrain Lift Truck



SKID STEER LOADER

OW: Operating weight

303 Series



307 Series



308 Series



312 Series



CTL Series



BACKHOE LOADER

OW: Operating weight

83C



83D



84C

